


# SI-100


## User Manual



### Waterproof No Touch Button

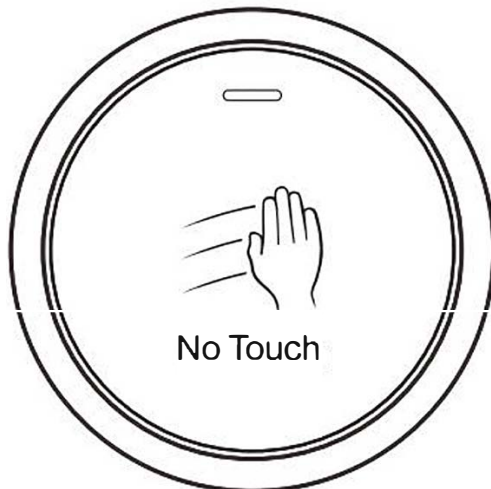

Round

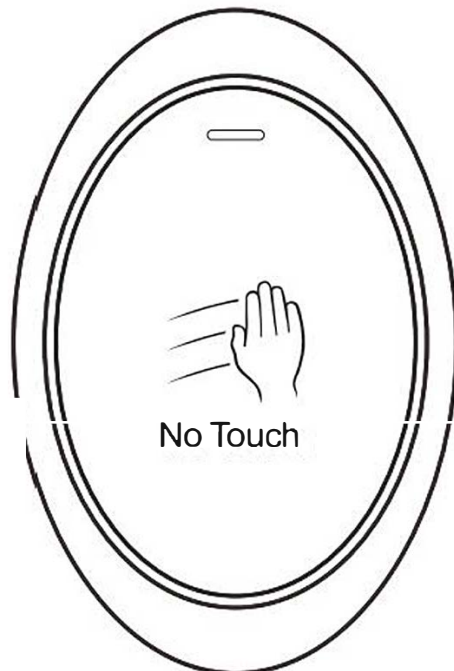

Ellipse

## Main Features

- > IP66 waterproof
- > Zinc-alloy housing
- > Output contact: NO/NC/COM
- > Sensor distance: 3~10cm (Adjustable)
- > Red LED indicator: standby
- > Green LED indicator: active
- > 5s, 10s or Toggle Mode Timer Delay (Optional)


## Specifications

<b>Operating Voltage</b> Idle Current Working Current	<b>10~24V DC</b> ≤15mA ≤25mA
Sensor Distance	3~10cm (Adjustable)
Output	NC or NO
Infrared Wavelength	940 nm
Timer Delay ( <b>Optional</b> )	5s / 10s / Toggle Mode
<b>Environment</b> Operating Temperature Operating Humidity	<b>IP66 Waterproof</b> -20°C~+60°C 0%~86%
<b>Physical</b> Dimension  Unit Weight Shipping Weight	<b>Zinc-alloy</b> Diameter: 73mm, Thickness: 20mm (Round) L105 x W69 x H20 mm(Ellipse) 150g(Round) 200g(Ellipse) 210g(Round) 260g(Ellipse)

## Wiring

Wire Color	Function	Notes
Red	Power +	10~24 Volts DC
Black	GND	Gound
Green	NC	Nomally Closed
Brown	COM	Common
White	NO	Normally Open

## Sensor Distance and Timer Delay (Optional) Adjustment

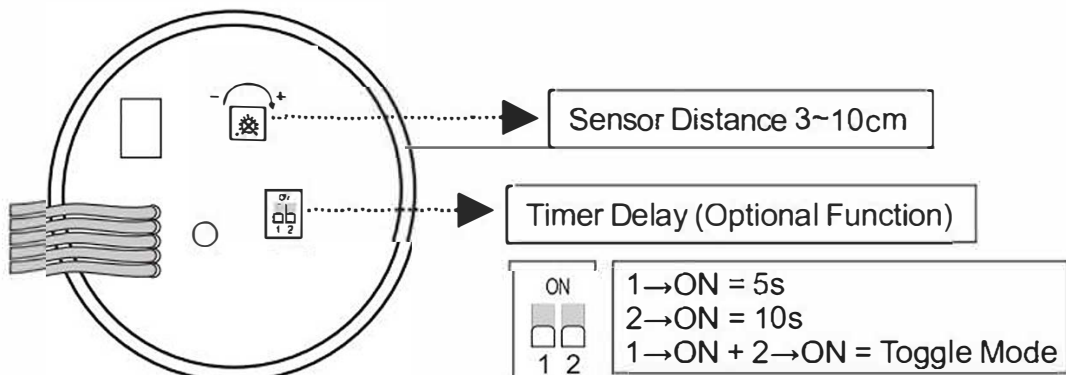

## Packing List

Item	Quantity
Gift Box	1
No Touch Button	1
Manual	1
Self Tapping Screw	2
Wall Fixing Plug	2

